

11/15/00

+

JC891 U.S. PTO

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

Only for new nonprovisional applications under 37 CFR 1.53(b)

Attorney Docket No.

35.C14928

First Named Inventor or Application Identifier

NOBUTAKA MIYAKE

Express Mail Label No.

Commissioner for Patents  
Box Patent Application  
Washington, DC 20231

JC825 U.S. PTO

09/11956

11/15/00

**APPLICATION ELEMENTS**

See MPEP chapter 600 concerning utility patent application contents.

**ADDRESS TO:**

1. ☒ Fee Transmittal Form  
(Submit an original, and a duplicate for fee processing)
2. ☐ Applicant claims small entity status.  
See 37 CFR 1.27.
3. ☒ Specification *Total Pages* **52**
4. ☒ Drawing(s) (35 USC 113) *Total Sheets* **14**
5. ☐ Oath or Declaration *Total Pages*
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 17 completed)  
[Note Box 6 below]
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed Statement attached deleting  
inventor(s) named in the prior application, see  
37 CFR 1.63(d)(2) and 1.33(b)
6. ☒ Application Data Sheet. See 37 CFR 1.76

7. ☐ CD-ROM or CD-R in duplicate, large table or Computer  
Program (*Appendix*)
8. ☐ Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Form (CRF)
- b. Specification Sequence Listing on:
- i. ☐ CD-ROM or CD-R (2 copies); or
- ii. ☐ paper
- c. ☐ Statements verifying identity of above copies

**ACCOMPANYING APPLICATION PARTS**

9. ☐ Assignment Papers (cover sheet & document(s))
10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney  
(when there is an assignee)
11. ☐ English Translation Document (if applicable)
12. ☐ Information Disclosure ☐ Copies of IDS  
Statement (IDS)/PTO-1449 Citations
13. ☐ Preliminary Amendment
14. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
15. ☐ Certified Copy of Priority Document(s)  
(if foreign priority is claimed)
16. ☐ Other: \_\_\_\_\_

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. \_\_\_\_/\_\_\_\_\_  
Prior application information: Examiner \_\_\_\_\_ Group/Art Unit: \_\_\_\_\_

For CONTINUATION OR DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 5b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**18. CORRESPONDENCE ADDRESS**

☒ Customer Number or Bar Code Label **05514** (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

NAME

Address

City

State

Zip Code

Country

Telephone

Fax



CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
	TOTAL CLAIMS (37 CFR 1.16(c))	44-20 =	24	X \$ 18.00 =	\$ 432.00
	INDEPENDENT CLAIMS (37 CFR 1.16(b))	8-3 =	5	X \$ 80 00 =	\$ 400.00
	MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))			\$270.00 =	\$ 0.00
				BASIC FEE (37 CFR 1.16(a))	\$ 710.00
			Total of above Calculations = \$ 1542.00		
	Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).				
	TOTAL =				\$ 1542.00

19. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.


20. ☒ A check in the amount of \$ 1542.00 to cover the filing fee is enclosed.

21. ☐ A check in the amount of \$ \_\_\_\_\_ to cover the recordal fee is enclosed.

22. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☐ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

**SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED**

NAME	Brian L. Klock - Reg. No. 36,570
SIGNATURE	
DATE	November 15, 2000

BLK\cmv

#### INVENTOR INFORMATION

Inventor One Given Name: Nobutaka  
Family Name: MIYAKE  
Postal Address Line One: 9-3-203, Eda Nishi 1-chome, Aoba-ku  
City of Residence: Yokohama-shi  
State or Province of Residence: Kanagawa-ken  
Country of Residence: Japan  
Citizenship Country: Japan

#### CORRESPONDENCE INFORMATION

Correspondence Customer Number: 05514  
Fax: (212) 218-2200

#### APPLICATION INFORMATION

Title Line One: IMAGE PROCESSING APPARATUS, METHOD AND MEMORY  
Title Line Two: MEDIUM THEREFOR

Total Drawing Sheets: 14  
Formal Drawings?: Yes  
Application Type: Utility  
Docket Number: 35.C14928  
Secrecy Order in Parent Appl.?: No

#### REPRESENTATIVE INFORMATION

Representative Customer Number: 5514

#### PRIOR FOREIGN APPLICATIONS

Foreign Application One: 11-330183  
Filing Date: 11-19-1999  
Country: JAPAN  
Priority Claimed: Yes

IMAGE PROCESSING APPARATUS, METHOD  
AND MEMORY MEDIUM THEREFOR

BACKGROUND OF THE INVENTION

5 Field of the Invention

The present invention relates to an image processing apparatus, an image processing method and a memory medium therefor.

Related Background Art

10 Recently there is being standardized the so-called digital watermarking technology for embedding, in image information such as a photograph or a picture, additional information consisting of so-called copyright information such as the name of author or the  
15 presence/absence of permission for use in visually easily unrecognizable manner for dissemination through networks such as internet.

Also with the progress in image quality of the copying apparatus and the printer, in order to avoid  
20 illegal forging of banknotes, stamps, valuable documents etc., there is known a technology of embedding additional information such as the information indicating the number of the output device in the image, in order to specify the output device and  
25 the number thereof from the image printed on paper.

For example, the Japanese Patent Application Laid-Open No. 7-123244 proposes a technology of embedding

additional information in the high frequency range of the color difference component and saturation component which is of visually low sensitivity.

However, the above-described conventional  
5 technology has been associated with the following drawbacks. Fig. 13 illustrates embedding of general additional information in the digital watermarking technology. In the image information A, the additional information B is embedded by an adder 1301 to obtain  
10 multiplexed information C. Fig. 13 shows an example of embedding the additional information in the real space area of the image information. If such multiplexed information can be disseminated without image processing such as various filterings or encoding such  
15 as non-reversible compression, the additional information B can be easily extracted from the multiplexed information C even in the conventional technology. In the image information distributed on the internet, such extraction is possible through a  
20 digital filter for improving the image quality such as edge enhancement or smoothing, as long as there is certain noise resistance.

However, let us assume a case of printing the multiplexed image by an output device such as a printer  
25 and extracting the additional information from the print, employing a printer of representing ability of two to several gradation levels per color. Among the

recent ink jet printers, there is known a device capable of representing several gradation levels by employing inks of lower dye concentration or variably controlling the output dot diameter, but the gradation of the photographic image cannot be reproduced unless  
5 pseudo gradation process is adopted.

Thus, in the aforementioned case of printer output of the multiplexed information employing the digital watermarking technology shown in Fig. 13, the  
10 multiplexed information C at first changes to quantized information D by a pseudo gradation process 1401 as shown in Fig. 14. Then the quantized information D changed, by printing on paper by a printer 1402, to significantly deteriorated on-paper information (print)  
15 E. Consequently, the aforementioned extraction of the additional information from the on-paper information for the purpose of preventing forgery corresponds to the extraction of the additional information B from the on-paper information E after the processes shown in  
20 Fig. 14.

As the information is significantly changed by the processes 1401, 1402, it is very difficult to embed the additional information in visually easily unrecognizable manner and to correctly extract the  
25 embedded information from the information on paper.

Also Fig. 15 shows an example of conventional digital watermarking technology the image information

is synthesized for example to a high frequency range after conversion into a frequency range for example by Fourier transformation instead of the real space area. In the example shown in Fig. 15, the image information is converted into the frequency range by an orthogonal transformation process 1501, and the additional information is added to a visually easily unrecognizable specified frequency by an adder 1502.

After the image information is returned to the real space area by an inverse orthogonal transformation process 1503, there is executed a filtering process involving major changes such as the pseudo gradation process and the printer output as in the case shown in Fig. 14.

Fig. 16 shows a procedure of separation of the additional information from the information on paper. The information of the print is entered by passing the print through an image reading device 1601 such as a scanner. As the printed image has the gradation by the pseudo gradation process, the entered information is subjected to a gradation reconstruction process 1602 which is an inverse pseudo gradation process. The gradation reconstruction process is generally executed with an LPF (low-pass filter). The information after the reconstruction is subjected to an orthogonal transformation process 1603 and the embedded additional information is separated by the power of a specified

frequency in a separation process 1604.

As will be apparent from Figs. 15 and 16, there are involved a number of complex processes from the embedding of the additional information to the  
5 extraction thereof. In case of a color image, there is also involved a color conversion process for converting into the colors specific to the printer. In order to achieve satisfactory separation even after such complex processes, there is required to the insertion of a  
10 signal of a very high resistance. It is difficult to insert a highly resistant signal while maintaining the satisfactory image quality.

Also since the involved processes are many in number and complex, the process time required for  
15 embedding and extraction becomes very long.

Also in the process of the aforementioned Japanese Patent Application Laid-Open No. 7-123244 in which the additional information is embedded in the high frequency range, if the error diffusion method is  
20 employed in the subsequent pseudo gradation process, the additional information may be buried in the range of the texture generated by the error diffusion due to the characteristics of the high-pass filter specific to the error diffusion method so that the probability of  
25 failure in the extraction becomes very high. Also there is required a highly precise scanner device for the extraction.



Thus, the processes shown in Figs. 14 and 15 are not adequate in case the pseudo gradation process is to be adopted. Stated differently, there is required an embedding process for the additional information, fully  
5 utilizing the characteristics of the pseudo gradation process.

Examples of a process capable of combining the embedding of the additional information and the redundancy of the pseudo gradation process are  
10 disclosed in the Japanese Patent Registrations Nos. 2,640,939 and 2,777,800.

The former is to mix data into the image signal, in binarization with a systematic dither process, by selecting one of the dither matrixes representing a  
15 same gradation.

However it is difficult to output a photographic high image quality in the systematic dither process, unless employing a printer of a high resolution with a very high mechanical precision, since even a slight  
20 aberration in the mechanical precision results in a low frequency noise such as lateral streaks which is easily recognizable on the paper.

Also if the dither matrix is changed periodically, the frequency distribution is distorted by a specified  
25 frequency generated by the regularly arranged dither pattern to detrimentally affect the image quality.

Also the gradation representing ability varies

significantly according to the kind of the dither matrix. Particularly on paper, the area change rate for example by the overlapping of dots varies depending on the kind of the dither matrix, so that the density  
5 may fluctuate by the switching of the dither matrix even in an area where the image signal indicates a uniform density.

Also there may probably result erroneous extraction if the extraction is executed by estimating  
10 the dither matrix employed for binarization while the pixel values of the original image information is unclear.

On the other hand, the latter is to employ a color dither pattern process and to embed the additional  
15 information according to such color dither pattern. Also in such process, the deterioration of the image quality by switching is inevitable as in the former process.

Also in comparison with the former process, the  
20 latter process can embed the additional information of a larger amount, but results in a variation in the color hue resulting from the change in the arrangement of the color components, leading to a deterioration of the image quality particularly in the solid image area.

25 Also the extraction on paper is anticipated to become more difficult. In any case, these two processes depending on the change of the dither matrix

are associated with the drawback that the extraction is difficult while the deterioration of image quality is considerably large.

Therefore, the present applicant already proposed  
5 a method capable, utilizing the texture generated by the error diffusion method, of artificially preparing a combination of the quantized values that cannot be generated in the ordinary pseudo gradation process, thereby embedding the additional information.

10 In this method, the image quality is visually not deteriorated since there is only involved a slight change in the shape of the texture. Also the density in the aerial gradation can be maintained by employing a method of changing the quantization threshold value  
15 in the error diffusion method, so that the additional information can be extremely easily embedded.

In the above-described method, however, it is necessary to distinguish whether the texture is artificial or not at the extracting operation. In the  
20 print on paper, the texture may not be satisfactorily reproduced by the displacement of image dot from the desired print position for example by an error in the dot placement.

Also in case of a color image, the additional  
25 information is embedded principally in a color component of lowest visual sensitivity, but the judgment of texture in the real space area is easily

affected by other color components, so that the extraction of the additional information becomes difficult.

There is also known a method, as disclosed in the Japanese Patent Registration No. 2,833,975, of embedding in the image additional information of a very large information amount such as audio information. Such method is to convert the audio information into dot codes known as so-called two-dimensional bar codes and print such codes in a marginal area of the image or in the image itself.

In such method, however, the embedded dot codes deteriorate the aesthetic feature of the image since such dot codes are not embedded in a not easily recognizable manner in the image information.

Though there is described an example of embedding the codes with transparent paint in the image in order to achieve not easily recognizable embedding, such method not only requires transparent ink leading to an increase in the cost but also deteriorates the image quality of the output on paper.

#### SUMMARY OF THE INVENTION

In consideration of the foregoing, an object of the present invention is to provide an image processing apparatus, an image processing method and a memory medium therefor, capable of resolving at least any of

the foregoing drawbacks.

Another object of the present invention is to provide an image processing apparatus, an image processing method and a memory medium therefor, capable of adding predetermined information to an image while suppressing the deterioration in image quality resulting from the addition of the predetermined information to the image and enabling precise extraction of the embedded information.

Still another object of the present invention is to provide an image processing apparatus, an image processing method and a memory medium therefor, enabling precise extraction of predetermined information from an image to which the predetermined information is added.

The foregoing objects can be attained, according to a preferred embodiment of the present invention, by an image processing apparatus adapted to add predetermined information to an image, comprising an input unit for entering the image, a division unit for dividing the entered image into plural image areas, a quantization unit for quantizing, by the error diffusion method, the image area divided by the division unit, and a control unit for controlling the quantizing condition by the quantization unit in the unit of each image area.

Also according to another preferred embodiment of

the present invention, there is provided an image processing apparatus adapted to add predetermined information to an image, comprising an input unit for entering the image, a division unit for dividing the entered image into plural image areas, transformation means for executing orthogonal transformation on the image area divided by the division unit, a classification unit for classifying the image areas into plural classes according to the transformation process of the transformation unit, and an extraction unit for extracting the predetermined information based on a feature amount of each of the classified classes.

According to the present invention, there are further provided an image processing apparatus, an image processing method and a memory medium therefor with a novel function.

Still other objects of the present invention, and the features thereof, will become fully apparent from the following detailed description which is to be taken in conjunction with the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing the principal parts of an image processing system of the present invention;

Fig. 2 is a block diagram showing an additional information multiplexing device showing in Fig. 1;

Fig. 3 is a block diagram showing the principal parts of an error diffusing unit shown in Fig. 2;

Fig. 4 is a flow chart showing the sequence of a multiplexing unit including a quantization control unit;

Fig. 5 is a view showing an example of block formation;

Figs. 6A and 6B are views showing examples of change of quantizing threshold value in the quantizing condition;

Fig. 7 is a block diagram showing the principal parts of an additional information extracting unit shown in Fig. 1;

Fig. 8 is a schematic view showing the inclination of an image in the scanner image;

Fig. 9 is a view showing an example of classification in the orthogonally transformed blocks;

Fig. 10 is a block diagram showing the principal parts of a second embodiment of the additional information separating unit of the present invention;

Figs. 11A, 11B, 12A and 12B are views showing examples of block reformation by a block formation control unit shown in Fig. 10;

Figs. 13, 14 and 15 are block diagrams showing examples of conventional multiplexing; and

Fig. 16 is a block diagram showing an example of conventional extraction.

## DESCRIPTION OF THE PREFERRED EMBODIMENTS

### [Embodiment]

Now the present invention will be clarified in detail by an embodiment thereof, with reference to  
5 accompanying drawings. The image processing apparatus in the present embodiment can be efficiently incorporated as a printer driver software or an application software in a computer for preparing image information to be outputted to a printer engine, but  
10 can also be incorporated as a hardware or a software in the main body of a copying apparatus, a facsimile apparatus or a printer.

Fig. 1 is a block diagram showing the configuration of an image processing system  
15 constituting a first embodiment.

Input terminals 100, 101 are respectively used for entering image information of multiple gradation levels, and additional information to be embedded in the image information.

20 Such additional information is different from the image information entered from the input terminal 100, for example audio information, text information, various information relating to the image entered by the input terminal 100 such as copyright, date and time  
25 of image taking, location of image taking, name of image taking person etc., or even completely different image information.



An additional information multiplexing device 102 serves to embed the additional information in the image information in a visually not easily recognizable manner. The additional information multiplexing device  
5 102 executes quantization of the entered image information of multiple gradation levels in addition to the embedding of the additional information.

A printer 103 executes, by a printer engine, the output of the quantized information prepared by the  
10 additional information multiplexing device 102. The printer is assumed to be a printer capable of gradational represented by a pseudo gradation process, such as an ink jet printer or a laser printer.

The information on the output print is read by a  
15 scanner 104, and the additional information embedded in the print is extracted by an additional information extracting device 105 and is outputted to an output terminal 106.

Fig. 2 is a block diagram showing the  
20 configuration of the additional information multiplexing device 102 shown in Fig. 1.

An error diffusion unit 200 executes a pseudo gradation process employing the error diffusion method on the entered image information to convert the number  
25 of gradation level thereof into a fewer number of quantization levels, in order to represent the gradation by area by the quantized levels of plural

pixels. The details of the error diffusion process will be explained later.

A block forming unit 201 serves to divide the entered image information in the unit of a  
5 predetermined area. Such block may be rectangular or a non-rectangular area.

A quantization condition control unit 202 controls and changes the quantization condition in the unit of a block formed by the block forming unit 201. The  
10 quantization condition control unit 202 controls the quantizing condition based on the additional information entered from the input terminal 101.

A control unit 210 is composed for example of a CPU 211, a ROM 212 and a RAM 213. The CPU 211 controls  
15 the function of the aforementioned components and the process according to a control program stored in the ROM 212. The RAM 213 is used as a work area of the CPU 211.

Fig. 3 is a block diagram showing the details of  
20 the error diffusion unit 200. The general error diffusion process is described in detail by R. Floyd and L. Stainberg in "An Adaptive Algorithm for Spatial Grayscale", SID Symposium Digest of Paper pp. 36-37 (1975).

25 The error diffusion process will be explained in the following, with an example where the quantization value is binary.

An adder 300 adds the pixel value of a contemplated pixel in the entered image information and a quantization error distributed from an already binarized peripheral pixel, and a comparison unit 301  
5 compares the result of addition of the error with a quantization threshold value from the quantization condition control unit 202, and outputs "1" if the former is larger than the threshold value or "0" if otherwise.

10 In case of representing the gradation of a pixel for example with a precision of 8 bits, it is customary to represent the maximum value of the gradation levels by "255" and the minimum value by "0". It is assumed that a dot is printed (for example with ink, toner  
15 etc.) on the paper when the quantization value is "1".

A subtractor 302 calculates the error between the result of quantization and the aforementioned result of addition, and an error distribution calculation unit 303 distributes the error to the peripheral pixels  
20 which are to be subjected to the quantization process thereafter. The error is distributed according to a proportion recorded in an error distribution table 304 which is experimentally prepared in advance according to the relative distance to the contemplated pixel.

25 The distribution table 304 shown in Fig. 3 shows distribution to four surrounding pixels, but such example is not restrictive.

In the following there will be explained the operation sequence of the entire system including the quantization condition control unit 202, with reference to a flow chart shown in Fig. 4, in which explained is  
5 a case where the quantization value is binary.

A step S401 is the initialization of a variable i, which counts the address in the vertical direction.

A step S402 is the initialization of a variable j, which counts the address in the horizontal direction.

10 A next step S403 is a discrimination step by the addresses values i, j and discriminates whether the coordinate of the current addresses i, j belongs to an area in which the additional information is to be embedded.

15 Now reference is made to Fig. 5 for explaining the area in which the additional information is to be embedded. Fig. 5 shows an image having a horizontal pixel number WIDTH and a vertical pixel number HEIGHT. It is assumed that the additional information is to be  
20 embedded in such image. The image is divided into blocks of N pixels in the horizontal direction and M pixels in the vertical direction, starting from an original point at the upper left corner of the image. In the first embodiment, the block formation is  
25 executed by taking the original point as a reference point, but it is also possible to adopt another reference point separate from the original point.

In order to embed the information as large as possible in the image, the blocks of  $N \times M$  pixels each are arranged starting from the reference point. Thus, there are obtained following relations for the number  $W$  of the blocks that can be arrange in the horizontal direction and the number  $H$  of the blocks that can be arranged in the vertical direction:

$$W = \text{INT}(\text{WIDTH}/N) \quad (1)$$

$$H = \text{INT}(\text{HEIGHT}/M) \quad (2)$$

wherein  $\text{INT}(x)$  indicates the integral part of  $x$ .

The numbers of pixels corresponding to the remainders in the relations (1) and (2) correspond to the marginal portion when the plural blocks of  $N \times M$  pixels are arranged, and are outside the area of embedding of the additional information.

Again referring to Fig. 4, if the step S403 identifies that the currently processed pixel is outside the embedding area for the additional information, a step S404 sets a quantization condition C. On the other hand, if the currently processed pixel is identified inside the embedding area for the additional information, the additional information to be embedded is fetched. For the purpose of simplicity, it is assumed that the additional information is represented in each bit with an arrangement "code[ ]".

For example, if the additional information consists of 48 bits, one bit each is stored from code

[0] to code [47]. A step S405 substitutes the information in the arrangement code [ ] into a variable bit in the following manner:

$$\text{bit} = \text{code} [\text{INT}(i/M) \times W + \text{INT}(j/N)] \quad (3)$$

5        Then a step S406 discriminates whether the substituted variable bit is "1". As the information in the arrangement code [ ] is one bit each, the variable bit has a value "0" or "1".

10        In case the step S406 identifies a value "0", a step S407 sets a quantization condition A, but, in case a value "1" is identified, a step S408 sets a quantization condition B.

15        Then a step S409 executes a quantization process based on thus set quantization condition. The quantization process corresponds to the error diffusion process explained in relation to Fig. 3.

20        Then a step S410 steps up the variable j in the horizontal direction, and a step S411 discriminates whether the variable j is smaller than the horizontal pixel number WIDTH of the image. Thus the above-described procedure is repeated until the number of the processed pixels reaches the horizontal pixel number WIDTH.

25        When the process in the horizontal direction is completed corresponding to the pixel number WIDTH, a step S412 steps up the variable i in the vertical direction, and a step S413 discriminates whether the

variable  $i$  is smaller than the vertical pixel number HEIGHT. Thus the above-described procedure is repeated until the number of processed pixels reaches the vertical pixel number HEIGHT.

5           The above-described operation sequence allows to change the quantization condition in the unit of a block consisting of  $N \times M$  pixels.

10           In the following there will be explained examples of the quantization conditions A, B, C. The quantization condition in the error diffusion method includes various factors, but that in the first embodiment is assumed to be the quantization threshold value. There may be adopted any quantization threshold value for the quantization condition C, since it is  
15           used outside the embedding area for the additional information.

          In the aforementioned gradational representation with 8 bits for a pixel and with binary quantization levels, the maximum value "255" and the minimum value  
20           "0" become the representative values of quantization, and an intermediate value "128" is often adopted as the quantization threshold value.

          More specifically, in the quantization condition C, the quantization threshold value is fixed at "128".  
25           Since the quantization conditions A, B are used in the block inside the embedding area for the additional information, it is necessary to generate a difference

in the image quality depending on the difference in the quantization condition. The difference in the image quality has to be represented in a visually not easily recognizable manner and has to be precisely detectable on the paper.

Figs. 6A and 6B illustrate examples of the quantization conditions A, B. Fig. 6A shows the period of change in the quantization threshold value in the quantization condition A. In Fig. 6A, each square corresponds to a pixel, and a white square indicates a fixed threshold value while a gray square indicates a variable threshold value.

Thus, in the example shown in Fig. 6A, the block consists of a matrix of 8 pixels in the horizontal direction and 4 pixels in the vertical direction, and a steeply different threshold value is set in the gray squares.

Fig. 6B similarly shows the period of change in the quantization threshold value in the quantization condition B. In Fig. 6B, the block consists of a matrix of 4 pixels in the horizontal direction and 8 pixels in the vertical direction, and a steeply different threshold value is set in the gray squares.

In the aforementioned case of gradation levels of 8 bits per pixel, the fixed threshold value is selected as "128" while the steeply different threshold value is selected as "10" as an example. With a lower



quantization threshold value, the quantized value of the contemplated pixel more easily assumes a value "1" (quantization representative value "255"). Thus, in the examples shown in Figs. 6A and 6B, the quantization value "1" tends to appear more frequently in the gray squares.

Stated differently, among the blocks of  $N \times M$  pixels each, there are mixed the blocks in which the dots are generated with the pattern of the gray squares shown in Fig. 6A and those in which the dots are generated with the pattern of the gray squares shown in Fig. 6B.

In the error diffusion method, the image quality is not significantly affected by a slight change in the quantization threshold value. In the systematic dither method, the image quality in gradational representation is significantly affected by the dither pattern to be employed.

In the error diffusion method involving the periodic change in the quantization threshold value as explained in the foregoing, the gradational representation determining the image quality is after all governed by the error diffusion method, so that the image quality of the gradational representation is scarcely affected by a slight change in the arrangement of dots or by a change in the texture generation.

Even in case of a change in the quantization

threshold value, the error corresponding to the difference between the signal value and the quantized value is distributed to the surrounding pixels, so that the entered signal value is macroscopically retained.

5 Stated differently, the error diffusion method has a very large redundancy in the arrangement of dots and in the generation of texture.

In the following there will be given an explanation on the additional information extracting unit 105.

Fig. 7 is a block diagram showing the configuration of the additional information extracting unit 105. An input terminal 700 enters the image information read by the scanner. The scanner to be employed preferably has a resolution at least equal to that of the printer employed for preparing the print. In order to exactly read the presence of the dots on the print, the resolution of the scanner has to be at least twice of that of the printer, according to the sampling principle. However, a resolution of the scanner at least equal to that of the printer can identify, even if not exactly, the presence of the dots.

In the first embodiment, for the purpose of ease of explanation, the resolution of the printer is assumed to be equal to that of the scanner.

A geometrical displacement detection unit 701

detects the geometrical displacement of the image entered by the scanner. The image information entered from the input terminal 700, having been subjected to the processes of output by the printer and input by the scanner, may be significantly displaced geometrically from the image information prior to the output by the printer.

Therefore, the geometrical displacement detection unit 701 is provided with a detection unit for detecting four points in the end portion where the image information is assumed to be printed in the print. If the resolution of the printer is same as that of the scanner, the rotation (inclination) of the image, which is caused for example by skewed paper feeding on the printer at the recording operation on paper or by displacement of the print at the setting thereof on the scanner, is a major factor to be corrected. The detection of the four points in the end portion allows to judge the level of displacement in the rotating direction.

A block forming unit 702 forms blocks in the unit of  $P \times Q$  pixels. This block has to be smaller than the block of  $N \times M$  pixels formed at the multiplexing. More specifically there have to be satisfied following relationships:

$$P \leq N, Q \leq M \quad (4)$$

Also the blocks of  $P \times Q$  pixels each are formed

with a skipping of a predetermined interval, in such a manner that a block of  $P \times Q$  pixels is contained in each area that is assumed to be the block of  $N \times M$  pixels formed at the multiplexing. The number of  
5 pixels for such skipping is basically  $N$  pixels in the horizontal direction and  $M$  pixels in the vertical direction, but it is necessary to calculate the amount of displacement per block by dividing the displacement amount detected by the geometrical displacement  
10 detection unit 701 with the number of blocks and to execute correction by adding such displacement amount per block to the number of pixels of skipping.

Fig. 8 shows the block formation with the correction for the displacement amount, whether the  
15 largest rectangular area indicates the scanner image transmitted from the scanner, and a large inner area  $D$  surrounded by thick lines represents an image print area where the image is assumed to be printed. The detection of four end points of the image print area  $D$   
20 allows to judge the rotational displacement of the image information.

The detection of the end portion may be achieved by recording a marker, indicating the end portion, in advance at the printing operation or by detecting the  
25 difference in density between the white area of the paper and the printed area. Based on the displacement  $T$  in the horizontal direction and the displacement  $S$  in

the vertical direction, the displacement amount (T', S') per block can be calculated as follows:

$$T' = T \times M / \text{HEIGHT} \quad (5)$$

$$S' = S \times N / \text{WIDTH} \quad (6)$$

5        A smaller rectangular area surrounded by thick lines indicates a block formed with  $P \times Q$  pixels. For the simplicity of explanation, the formed blocks are shown only in the upper first row. By the block formation corrected according to the equations (5) and 10        (6), the start position of each block is so controlled that a block of  $P \times Q$  pixels is contained in an area which is assumed to the block of  $N \times M$  pixels formed at the multiplexing.

15        An orthogonal transformation unit 703 executes orthogonal transformation on the  $P \times Q$  pixels formed as a block. However, for executing two-dimensional orthogonal transformation, the blocks have to be formed with square blocks where  $Q = P$ . In the first embodiment, DCT (discrete cosine transformation) is 20        adopted as an example.

The two-dimensional DCT coefficients for a block of  $P \times P$  pixels are given by:

$$\begin{aligned} C(x) &= 1/\sqrt{2} & (x=0) \\ C(x) &= 1 & (x \neq 0) \end{aligned} \quad (7)$$

25        A classification unit 704 executes classification by the band of the orthogonal transformation coefficients.

Fig. 9, showing an example of classification where  $P = Q = 16$ , represents the orthogonal transformation coefficients  $F(u, v)$  in a block, wherein the upper left corner square corresponds to the DC component and the remaining 255 squares correspond to the AC components.

As an example, there are formed two classes, namely a class A centered at  $F(8, 4)$  and a class B centered at  $F(4, 8)$ . These two classes are indicated by thick lines. The classification unit need not classify all the 256 components but is only required to classify into plural classes having centers at the desired components. The number of required classes correspond to the number of conditions for quantization control at the multiplexing. Stated differently, the number of classes does not become larger than the number of conditions for quantization control.

A power comparison unit 705 compares the sum of the electric power of the classes. For achieving faster calculation, the electric power may be replaced by the absolute value of the generated transformation coefficient. The signal of the additional information is discriminated by comparing the sum of the electric power of the classes. In the following there will be explained, as an example, a case of applying the quantization conditions A, B shown in Figs. 6A and 6B at the embedding of the additional information. In the quantization with the conditions A, B, as explained in

the foregoing, there tends to be generated a texture in which the dots are arranged in oblique directions of different angles. Thus, in a block quantized with the quantization condition A, a large power is generated in the class A shown in Fig. 9 after the orthogonal transformation process.

On the other hand, in a block quantized with the condition B, a large power is generated in the class B in Fig. 9 after the orthogonal transformation. Thus, the relative comparison of the magnitude of powers of the classes A and B allows whether the quantization condition A or B is employed in multiplexing the concerned block. Since the quantization condition is related to the sign (bit in the equation (3)) of the additional information, the identification of the quantization condition allows to specify the sign of multiplexing.

In the example of the flow chart shown in Fig. 4, bit = 0 and bit = 1 are respectively assigned to the quantization conditions A and B. Therefore, bit = 0 can be identified if the power of the class A is larger, while bit = 1 can be identified if the power of the class B is larger.

In the quantization by the error diffusion method, the filter itself of the error diffusion method has the characteristics of a high-pass filter for passing the high frequency range. Therefore, the power of the low

to medium frequency range such as the classes A and B decreases in the transformation coefficients after the ordinary quantization, whereby the aforementioned discrimination is rendered possible.

5           If the power of such low to medium frequency range is relatively large, there can be assumed a situation where a large electric power is generated by an artificial control of the quantization condition. Stated differently, by changing the regularity of the  
10       changing period of the quantization condition, it is possible to generate a large power in desired manner with scarcely noticeable change in the image.

          In the first embodiment, there has been explained a case where the quantization condition at the  
15       multiplexing is controlled in two manners, namely the quantization conditions A and B, and the classification at the extraction is in two manners, namely the classes A and B. Such situation corresponds to a case where the additional information in the block consists of 1  
20       bit, but it is naturally possible to control the quantization condition in a larger number of manners and to execute classification in a larger number of classes. (The quantization condition C is excluded since it is applied outside the area of embedding the  
25       additional information.)

          In the first embodiment, it is not necessary to embed the information by orthogonal transformation at



the multiplexing as in the conventional art. A deviation in the frequency after the quantization is generated by a mere change in the quantization condition. Besides, since the deviation in the frequency is mixed in the high frequency components generated in the error diffusion method, such deviation is visually not easily recognizable. Also the precision of extraction becomes very high because the multiplexing is executed at the quantization step which is immediately prior to the transmission to the printer.

In the first embodiment explained in the foregoing, the image in the form of blocks becomes more inclined as the geometrical displacement increases, so that the frequency becomes displaced from the desired value. For example, even if the multiplexing is so executed as to generate a large electric power at  $F(4, 8)$ , the generated frequency becomes displaced from  $F(4, 8)$  as the image is inclined. For this reason, there can be conceived a configuration in which the configuration of the classes is dynamically changed according to the amount of geometrical displacement. Naturally there may be adopted only one classification if the displacement amount is limited.

Also the quantization conditions A, B, C and the classes A, B in the classification are merely an example and the present invention is not limited to

such example. There may be adopted another regularity, or there may be employed any arrangement of the steeply different quantization threshold value. Also the quantization condition may be changed with a variable  
5 cycle in the vertical and/or horizontal direction by means of a counter or with a quantization threshold value table in which the regularity is selected in advance.

Also the quantization has been explained by  
10 binarization as an example, but the present invention is not limited to such example.

Also the method of orthogonal transformation has been explained by DCT, but the present invention is not limited to such example, and there may be adopted other  
15 orthogonal transformations such as Hadamard transformation, Fourier transformation or wavelet transformation.

In the first embodiment, as explained in the foregoing, the quantization condition is changed in the  
20 unit of a block of  $M \times N$  pixels formed by dividing the image, and the information is embedded into the image by quantizing the image according to such quantization condition. Therefore, in comparison with the conventional method of information embedding by  
25 orthogonal transformation, it is rendered possible to embed the information into the image so as to suppress the deterioration in the image quality and to enable

precise extraction of the embedded information.

Also the embedded information can be extracted by  
executing orthogonal transformation in the unit of a  
block of  $P \times Q$  pixels formed by dividing the image,  
5 classifying the transformation coefficients of such  
orthogonal transformation into plural classes and  
comparing the electric powers of such classes.  
Therefore the embedded information can be extracted in  
more precise manner in comparison with the conventional  
10 method in which the coefficients of transformation are  
not classified into plural classes.

Fig. 10 is a block diagram showing the  
configuration of an additional information extracting  
unit in a second embodiment.

15 As the configuration shown in Fig. 10 is only  
partly different from that shown in Fig. 7, the  
corresponding components are represented by  
corresponding symbols and the following explanation  
will be given only on the different points.

20 Referring to Fig. 10, an evaluation unit 1000  
evaluates the result of comparison from a power  
comparison unit 705. There is evaluated the accuracy  
of discrimination by the relative comparison of the  
classes, by comparing the difference  $G$  of the powers of  
25 the classes and a predetermined threshold value  $TH$ . In  
case there are three or more classes, the difference in  
power between the class of the largest power and that

of the second largest power is assumed as G.

Stated differently, there is discriminated whether  
a class of a steeply different power level is present  
in the block of  $P \times Q$  pixels, by introducing an  
5 evaluation function G. Such class of the steeply  
different power level may not be generated by various  
conditions, such as the state of the image information,  
the precision of dot placement at the printer output,  
the reading precision of the scanner etc. If a class  
10 of the largest value is selected in a situation where  
the class of a steeply different power level is absent,  
the sign of the additional information may be  
erroneously judged. Therefore, the evaluation unit  
1000 determines the sign of the additional information  
15 according to the quantization condition of the class  
with the largest power, if the difference G in the  
power of the classes is equal to or larger than the  
predetermined threshold value TH.

If the difference G is smaller than the threshold  
20 value TH, the reliability is judged low and such  
information is supplied to a block formation control  
unit 1001, which controls the conditions of block  
formation. In the second embodiment, it changes the  
position of block formation. The block formation  
25 control unit 1001 determines the amount of change, and  
a block formation unit 1002 executes block formation  
again, employing the changed position as the original

point.

Figs. 11A and 11B show the mode of such change.  
Fig. 11A shows a block formed first time, and Fig. 11B  
shows a block formed second time. In Fig. 11B, a  
5 broken-lined block indicates the position of the block  
formed first time.

A larger inclined rectangle indicates an assumed  
block consisting of  $N \times M$  pixels. The block formation  
control unit 1001 has to control the amount of change  
10 so as not to overflow from such assumed block.

After the repeated block formation, the process is  
executed again as in the first time to calculate the  
difference  $G$  in the electric power, which is then  
subjected to comparison with the threshold value  $TH$ .  
15 If a class with a steeply different power level is  
generated by the repeated block formation, the sign of  
the additional information is determined based on such  
result. If a class with such steeply different power  
level is absent again, the class with the largest power  
20 is adopted if it is same as in the first cycle.

If the class with the largest power after the  
repeated block formation is different from that in the  
first cycle, there is adopted the class showing the  
large power difference  $G$  in the first or second cycle.  
25 Such discriminations repeated plural times allow to  
reduce the rate of erroneous judgment for the extracted  
additional information.

Figs. 12A and 12B show a mode of repeated block formation, different from that shown in Figs. 11A and 11B. Fig. 12A shows the block formation in the first cycle, while Fig. 12B shows the block formation in the second cycle. As in Fig. 11B, a solid-lined rectangle indicates a block formed again, and a broken-lined rectangle indicates a block formed first time. In this example, the size of the block is changed at the repeated block formation.

More specifically, the block formation first time is executed with  $P \times P$  pixels, while the block re-formation is executed with an increased size of  $2P \times 2P$  pixels. A class of a steeply different power level is more easily generated in the orthogonal transformation on  $2P \times 2P$  pixels than on  $P \times P$  pixels. In such case, the classification naturally has to be changed according to the block size.

For example, a class having the center at  $F(4, 8)$  at the block formation in the unit of  $P \times P$  pixels is changed, in case of block formation in the unit of  $2P \times 2P$  pixels, to a class having the center at  $F(8, 16)$ . Also in such case, the block re-formation has to be so controlled as not to overflow from the assumed block of  $N \times M$  pixels.

In the example shown in Figs. 12A and 12B, the priority is preferably given to the discrimination based on the block formation of the second time rather

than that of the first time. Thus there is adopted the class having the largest value in the block re-formation, regardless whether a class of a steeply different level is generated in the block re-formation.

5           In the foregoing there has been explained a case of executing the block formation of the first time with a unit of  $P \times P$  pixels and that of the second time with a unit of  $2P \times 2P$  pixels, but the increase in size is not limited to such example. In general, in case the  
10           block formation of the first time is executed with the unit of  $P \times Q$  pixels, it is effective to execute the block re-formation with the unit of  $K \times L$  pixels ( $P < K$  or  $Q < L$ ).

          In the foregoing there has been explained the  
15           discrimination method by block re-formation, but such method is not restrictive. It is also possible to repeat the block re-formation twice or more, or to execute plural block formations from the first time and to comprehensively judge the results in the block.

20           In the foregoing there has been explained each of the additional information multiplexing unit and the additional information extracting unit, but the second embodiment is not limited to the combination of these two units.

25           As explained in the foregoing, the second embodiment utilizes an evaluation unit for comparing the difference between the classes in the power with a

threshold value, and, in case the difference is equal  
to or less than the threshold value, executes the block  
formation again with a change in the position or size  
of the block, thereby enabling precise extraction of  
5 the embedded information.

In the foregoing second embodiment, there has been  
explained a method of extracting, from the image  
information, the embedded information which is embedded  
therein by applying a pseudo gradation process  
10 utilizing the error diffusion method on the image  
information, but the embedding method for the  
information to be extracted is not limited to the error  
diffusion method. For example, the information may be  
embedded for example by a pseudo gradation process  
15 utilizing the dither method.

The present invention may be applied to a system  
consisting of plural equipment (for example host  
computer, interface devices, reader, printer etc.) or  
an apparatus consisting of a single equipment (such as  
20 a copying machine or a facsimile apparatus), within an  
extent that the functions of the foregoing embodiments  
can be realized.

Also the present invention includes a case where  
the program codes of a software realizing the functions  
25 of the aforementioned embodiments are supplied to a  
computer of a system or an apparatus connected to  
various devices in order to operate the device so as to



realize the functions of the aforementioned embodiments and the functions of the aforementioned embodiments are realized by operating the devices by the computer (CPU or MPU) of the above-mentioned system or apparatus  
5 according to the program codes.

In such case the program codes themselves of the software realize the functions of the aforementioned embodiments, and the program codes themselves and the means for supplying the computer with such program  
10 codes, for example a memory medium storing the program codes, constitutes the present invention.

The memory medium storing such program codes can be, for example, a floppy disk, a hard disk, an optical disk, a magnetooptical disk, a CD-ROM, a magnetic tape,  
15 a non-volatile memory card or a ROM.

The present invention also includes such program codes not only a case where the functions of the aforementioned embodiments are realized by the execution of the read program codes by the computer but  
20 also a case where an operating system or the like functioning on the computer executes all or a part of the actual processes under the control of such program codes thereby realizing the functions of the aforementioned embodiments.

25 The present invention further includes a case wherein the supplied program codes are once stored in a memory provided in a function expansion board inserted

into the computer or a function expansion unit  
connected to the computer, and a CPU provided in the  
function expansion board or the function expansion unit  
executes all the process or a part thereof according to  
5 the instructions of such program codes, thereby  
realizing the functions of the aforementioned  
embodiments.

As explained in the foregoing, in adding  
predetermined information to an image, the present  
10 invention divides the image into plural image areas,  
then quantizes the image area by the error diffusion  
method and controls the quantization condition for such  
quantization in the unit of the image area, thereby  
suppressing the deterioration in the image quality  
15 resulting from the addition of the predetermined  
information to the image and enabling to embed the  
predetermined information in the image in such a manner  
that such embedded information can be precisely  
extracted.

20 Also in extracting predetermined information from  
an image in which the predetermined information is  
added, the present invention divides the image into  
plural image areas, then executes orthogonal  
transformation on the image areas, classifies the image  
25 areas into plural classes based on the orthogonal  
transformation and extracts the predetermined  
information based on a feature amount of each class

thus classified, thereby enabling to precisely extract the predetermined information from the image to which such predetermined information is added.

WHAT IS CLAIMED IS:

1. An image processing apparatus which embeds predetermined information in an image, the apparatus comprising:

5       input means for entering the image;

          division means for dividing the entered image into plural image areas;

          quantization means for quantizing the image areas divided by said division means, utilizing error  
10       diffusion method; and

          control means for controlling, in a unit of the image area, the quantization condition by said quantization means according to the predetermined information.

15

2. An image processing apparatus according to claim 1, wherein said quantization condition is a quantization threshold value.

20       3. An image processing apparatus according to claim 2, wherein said quantization condition changes the quantization threshold value based on a predetermined period.

25       4. An image processing apparatus according to claim 3, wherein said control means switches the predetermined period for changing the quantization

threshold value in the unit of said image area.

5. An image processing apparatus according to  
claim 4, wherein said control means switches the period  
5 in the horizontal direction and the period in the  
vertical direction for changing the quantization  
threshold value in the unit of the image area.

6. An image processing apparatus according to  
10 claim 3, wherein said control means has plural kinds of  
the predetermined periods and switches the  
predetermined period in the unit of the image area.

7. An image processing apparatus according to  
15 claim 1, wherein said predetermined information is  
audio information.

8. An image processing apparatus according to  
claim 1, wherein said predetermined information is  
20 information relating to the copyright of the image.

9. An image processing apparatus according to  
claim 1, wherein said predetermined information is  
added to the image in such a manner not easily visible  
25 to the human eye.

10. An image processing apparatus which extracts

predetermined information from an image in which the predetermined information is embedded, the apparatus comprising:

input means for entering the image;

5        transformation means for executing frequency transformation on the image areas divided by said division means;

10       classification means for classifying the image areas into plural classes based on the transformation process of said transformation means; and

      extraction means for extracting the predetermined information, based on a feature amount of each class thus classified.

15       11. An image processing apparatus according to claim 10, wherein said frequency transformation is an orthogonal transformation.

20       12. An image processing apparatus according to claim 10, further comprising comparison means for comparing the feature amount of the classified classes;

      wherein said extraction means extracts said predetermined information based on the result of comparison by said comparison means.

25

      13. An image processing apparatus according to claim 10, further comprising:

evaluation means for evaluating a result of  
evaluation; and

re-division means for executing again the division  
process of said division means, based on the result of  
5 evaluation by said evaluation means.

14. An image processing apparatus according to  
claim 13, wherein said re-division means executes  
division again by changing the dividing position of the  
10 division.

15. An image processing apparatus according to  
claim 13, wherein said re-division means executes  
division again by changing a size of division.

16. An image processing apparatus according to  
claim 10, wherein said feature amount is the absolute  
value of coefficients of transformation by said  
transformation means.

17. An image processing apparatus according to  
claim 10, wherein said feature amount is electric  
power.

18. An image processing apparatus according to  
claim 10, wherein said predetermined information is  
audio information.

19. An image processing apparatus according to claim 10, wherein said predetermined information is information relating to copyright of the image.

5        20. An image processing apparatus according to claim 10, wherein said predetermined information is added to the image in such a manner not easily visible to human eyes.

10        21. An image processing method capable of embedding predetermined information in an image, the method comprising:  
         an input step of entering the image;  
         a division step of dividing the entered image into  
15 plural image areas;  
         a quantization step of quantizing the image areas divided by said division means, utilizing error diffusion method; and  
         a control step of controlling, in a unit of the  
20 image area, the quantization condition by said quantization step according to the predetermined information.

25        22. An image processing method according to claim 21, wherein said quantization condition is a quantization threshold value.



23. An image processing method according to claim 22, wherein said quantization condition changes the quantization threshold value based on a predetermined period.

5

24. An image processing method according to claim 23, wherein said control step switches the predetermined period for changing the quantization threshold value in a unit of the image area.

10

25. An image processing method according to claim 24, wherein said control step switches the period in the horizontal direction and the period in the vertical direction for changing the quantization threshold value in the unit of the image area.

15

26. An image processing method according to claim 23, wherein said control step has plural kinds of the predetermined periods and switches the predetermined period in the unit of said image area.

20

27. An image processing method according to claim 21, wherein said predetermined information is audio information.

25

28. An image processing method according to claim 21, wherein said predetermined information is

information relating to the copyright of the image.

29. An image processing method according to claim  
21, wherein said predetermined information is added to  
5 the image in such a manner not easily visible to human  
eyes.

30. An image processing method which extracts  
predetermined information from an image in which the  
10 predetermined information is embedded, the method  
comprising:

an input step of entering the image;

a division step of dividing the entered image into  
plural image areas;

15 a transformation step of executing frequency  
transformation on the image areas divided by said  
division step;

a classification step of classifying the image  
areas into plural classes based on the transformation  
20 process of said information step; and

an extraction step of extracting the predetermined  
information, based on a feature amount of each class  
thus classified.

25 31. An image processing method according to claim  
30, wherein said frequency transformation is an  
orthogonal transformation.

32. An image processing method according to claim 30, further comprising a comparison step of comparing the feature amount of said classified classes;

5 wherein said extraction step extracts the predetermined information based on a result of comparison by said comparison step.

33. An image processing method according to claim 30, further comprising:

10 an evaluation step of evaluating a result of evaluation; and

15 a re-division means for executing again the division process of said division step, based on the result of evaluation by said evaluation step.

34. An image processing method according to claim 33, wherein said re-division step executes division again by changing the dividing position of the division.

35. An image processing method according to claim 33, wherein said re-division step executes division again by changing the size of division.

25 36. An image processing method according to claim 30, wherein said feature amount is the absolute value of the coefficients of transformation by said

transformation step.

37. An image processing method according to claim 30, wherein said feature amount is electric power.

5

38. An image processing method according to claim 30, wherein said predetermined information is audio information.

10

39. An image processing method according to claim 30, wherein said predetermined information is information relating to copyright of the image.

15

40. An image processing method according to claim 30, wherein said predetermined information is added to the image in such a manner not easily visible to human eyes.

20

41. A computer readable memory medium which stored program codes for embedding predetermined information in an image, the program codes comprising:

a code for entering the image;

a code for dividing the entered image into plural image areas;

25

a code for quantizing the image areas divided by said division means, utilizing error diffusion method; and

a code for controlling , in the unit of the image area, the quantization condition by said quantization means according to the predetermined information.

5        42. A computer readable memory medium which stored program codes for extracting predetermined information from an image in which the predetermined information is embedded, the program codes comprising:

         a code for entering said image;  
10        a code for executing frequency transformation on the image areas divided by said division means;  
         a code for classifying said image areas into plural classes based on the transformation process of said transformation means; and  
15        a code for extracting said predetermined information, based on a feature amount of each class thus classified.

         43. An image processing apparatus which adds  
20 predetermined information to an image, comprising:  
         input means for entering the image;  
         division means for dividing the entered image into plural image areas;  
         quantization means for quantizing the image areas  
25 divided by said division means, utilizing an error diffusion method; and  
         power generation means for generating power of a predetermined frequency component in unit of the image area according to the predetermined information,  
30        wherein the predetermined frequency component is a frequency component lower than a maximum frequency component generated by said quantization means.

44. An image processing method for adding predetermined information to an image, comprising:

an input step of entering the image;

5 a division step of dividing the entered image into plural image areas;

a quantization step of quantizing the image areas divided in said division step, utilizing an error diffusion method; and

10 a power generation step for generating power of a predetermined frequency component in unit of the image area according to the predetermined information,

wherein the predetermined frequency component is a frequency component lower than a maximum frequency  
15 component generated in said quantization step.

ABSTRACT OF THE DISCLOSURE

The invention provides an image processing apparatus capable of embedding predetermined information in an image, the apparatus comprising input  
5 means for entering the image, division means for dividing the entered image into plural image areas, quantization means for quantizing the image areas divided by the division means, utilizing error diffusion method, and control means for controlling, in  
10 the unit of the image area, the quantization condition by the quantization means according to the predetermined information.

FIG. 1

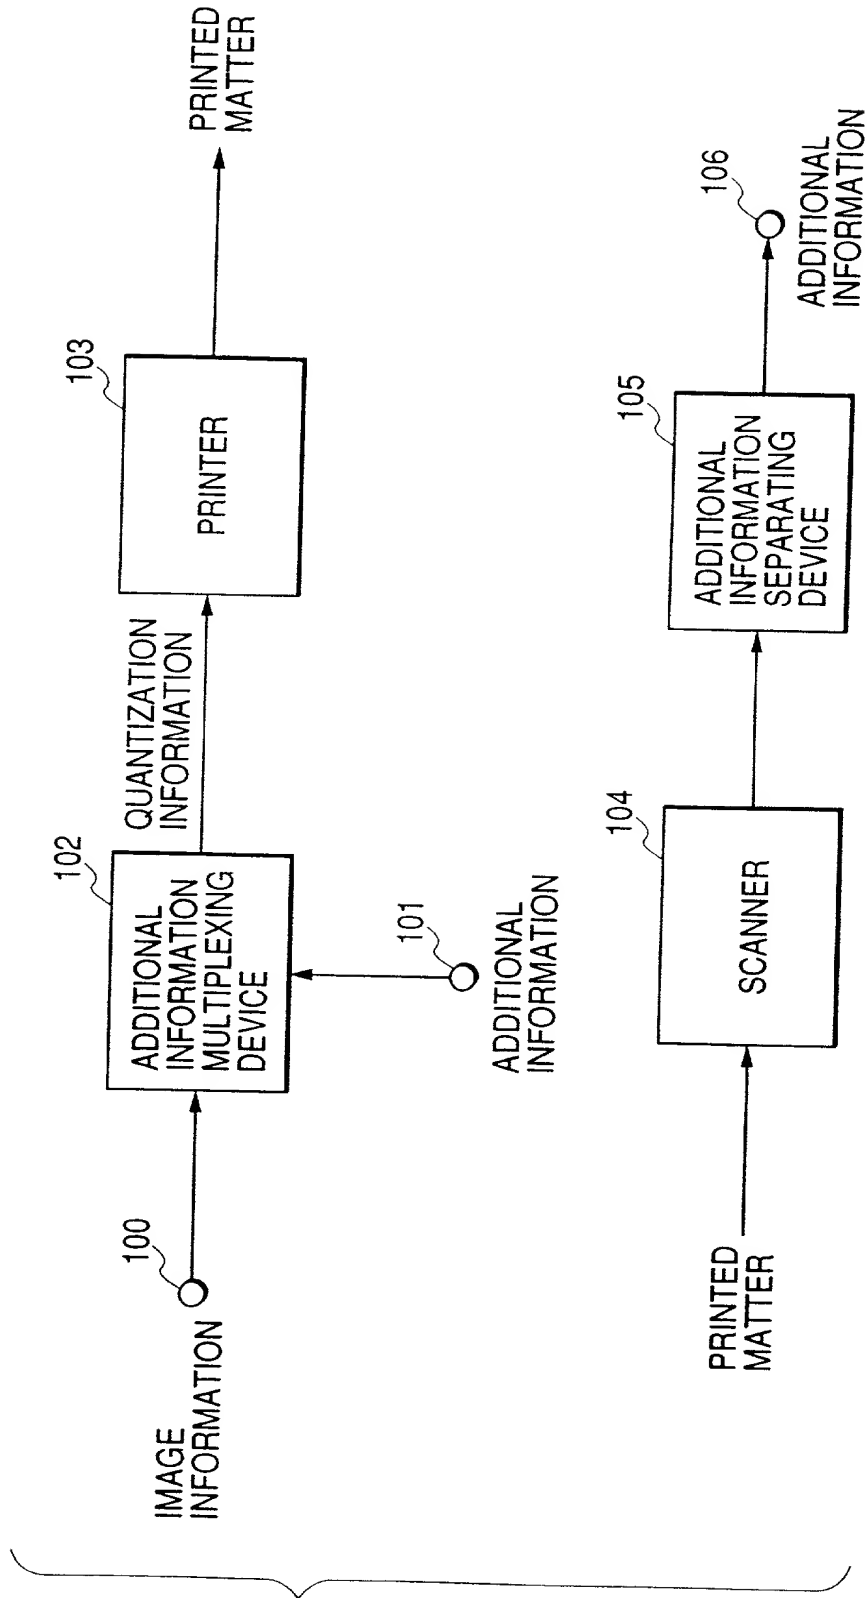




FIG. 2

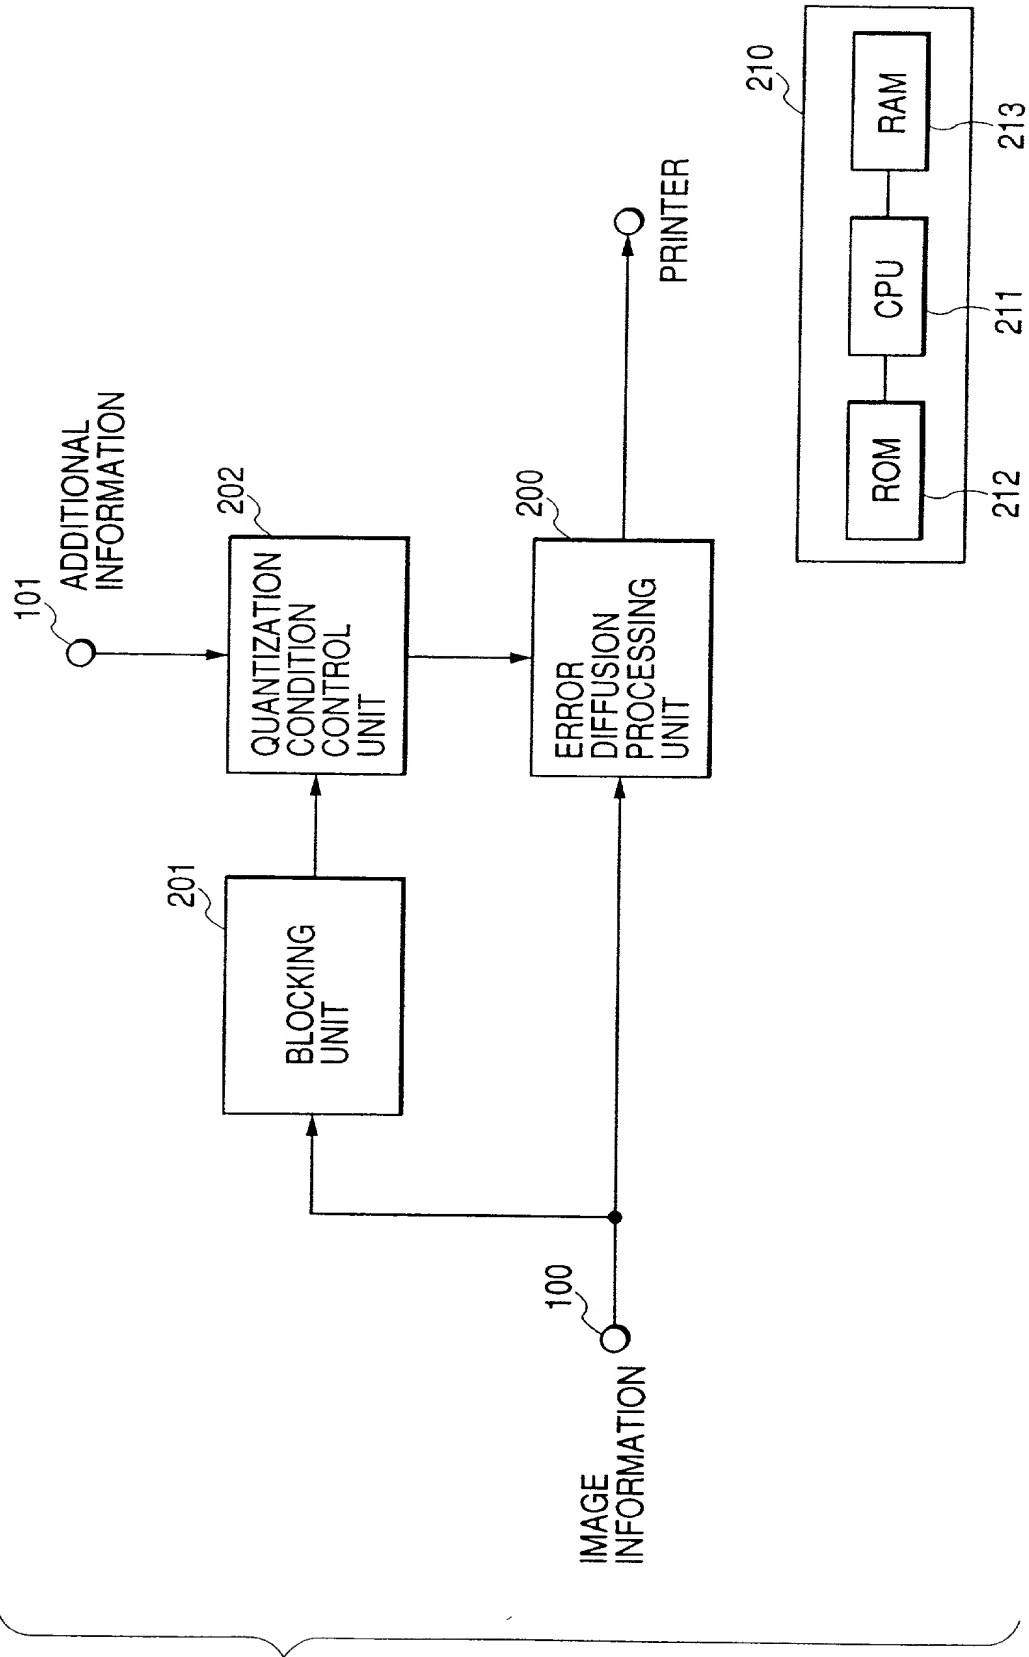


FIG. 3

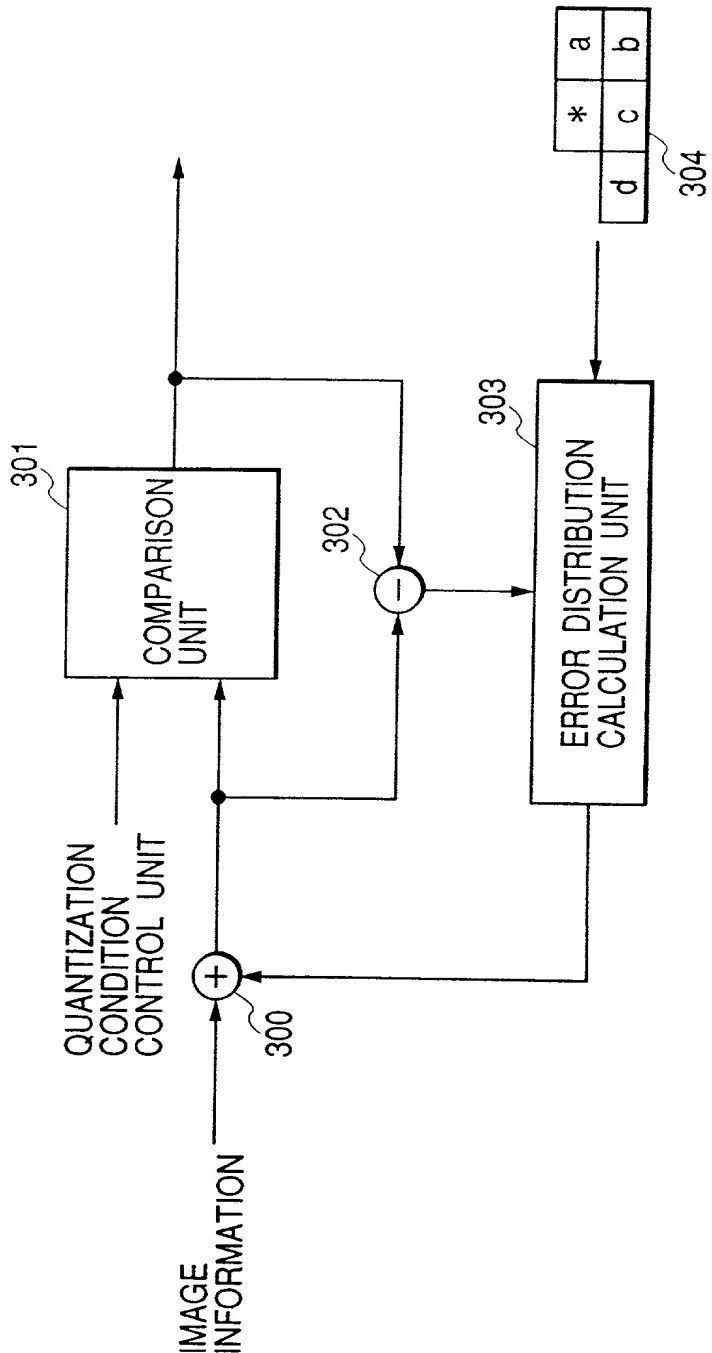


FIG. 4


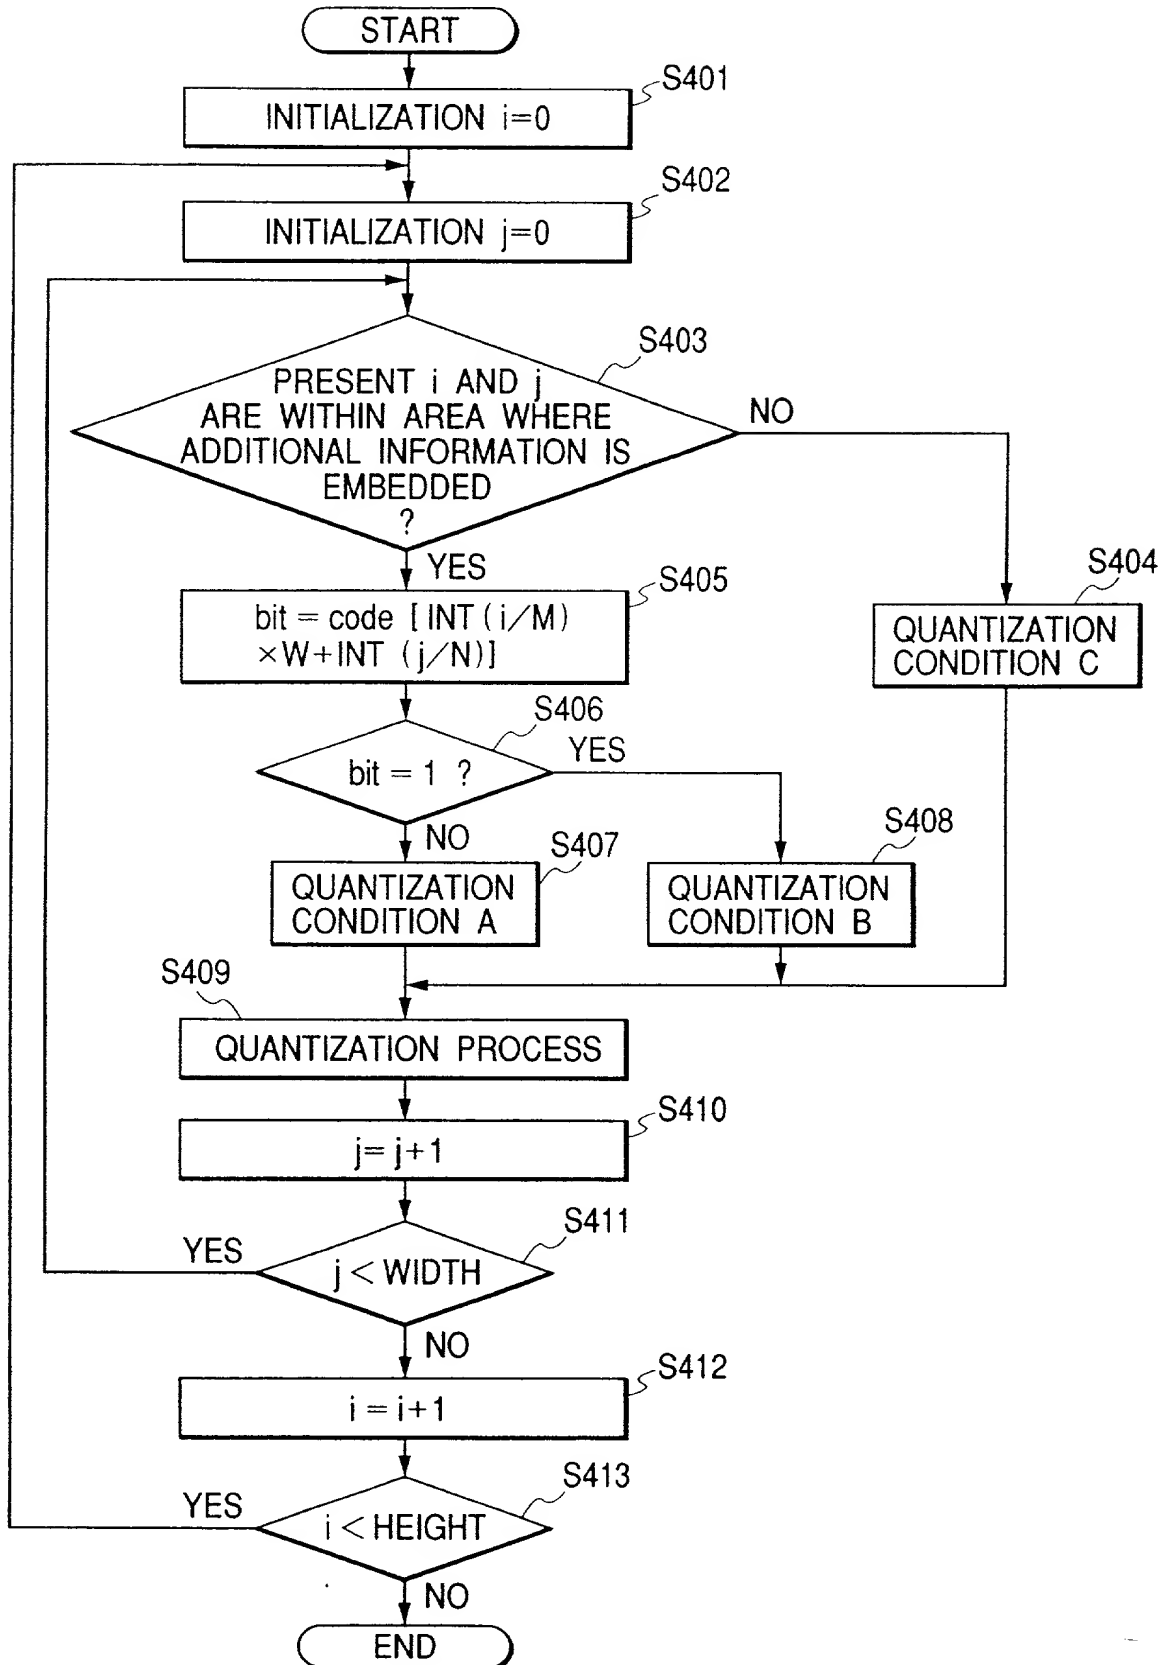


FIG. 5

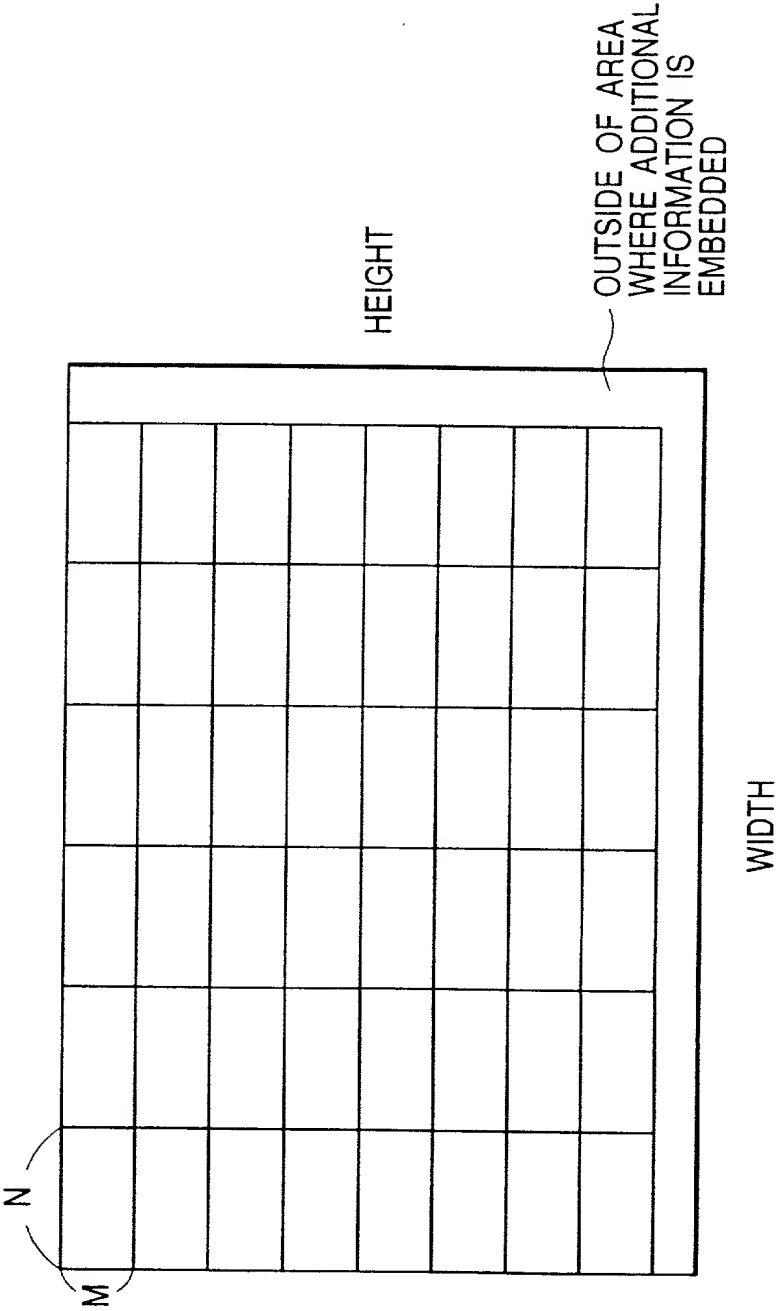

A 10x10 grid with 10 shaded cells. The shaded cells are located at the following (row, column) coordinates: (1, 1), (2, 2), (3, 3), (4, 4), (5, 5), (6, 6), (7, 7), (8, 8), (9, 9), and (10, 10). All other cells are white.

FIG. 7 is a block diagram of a system 700 for processing a scanner image. The system 700 includes a scanner image input 700, a geometric displacement detection unit 701, a blocking unit 702, an orthogonal transform unit 703, a classifying unit 704, and a power comparison unit 705. The units are connected in a sequential manner, with the scanner image input 700 providing input to the geometric displacement detection unit 701. The output of the geometric displacement detection unit 701 is fed into the blocking unit 702, which then feeds into the orthogonal transform unit 703. The output of the orthogonal transform unit 703 is fed into the classifying unit 704, which then feeds into the power comparison unit 705. The power comparison unit 705 has an output terminal. Additionally, the system 700 includes a control unit 210, which contains a ROM 212, a CPU 211, and a RAM 213, connected in a bus configuration.

FIG. 7


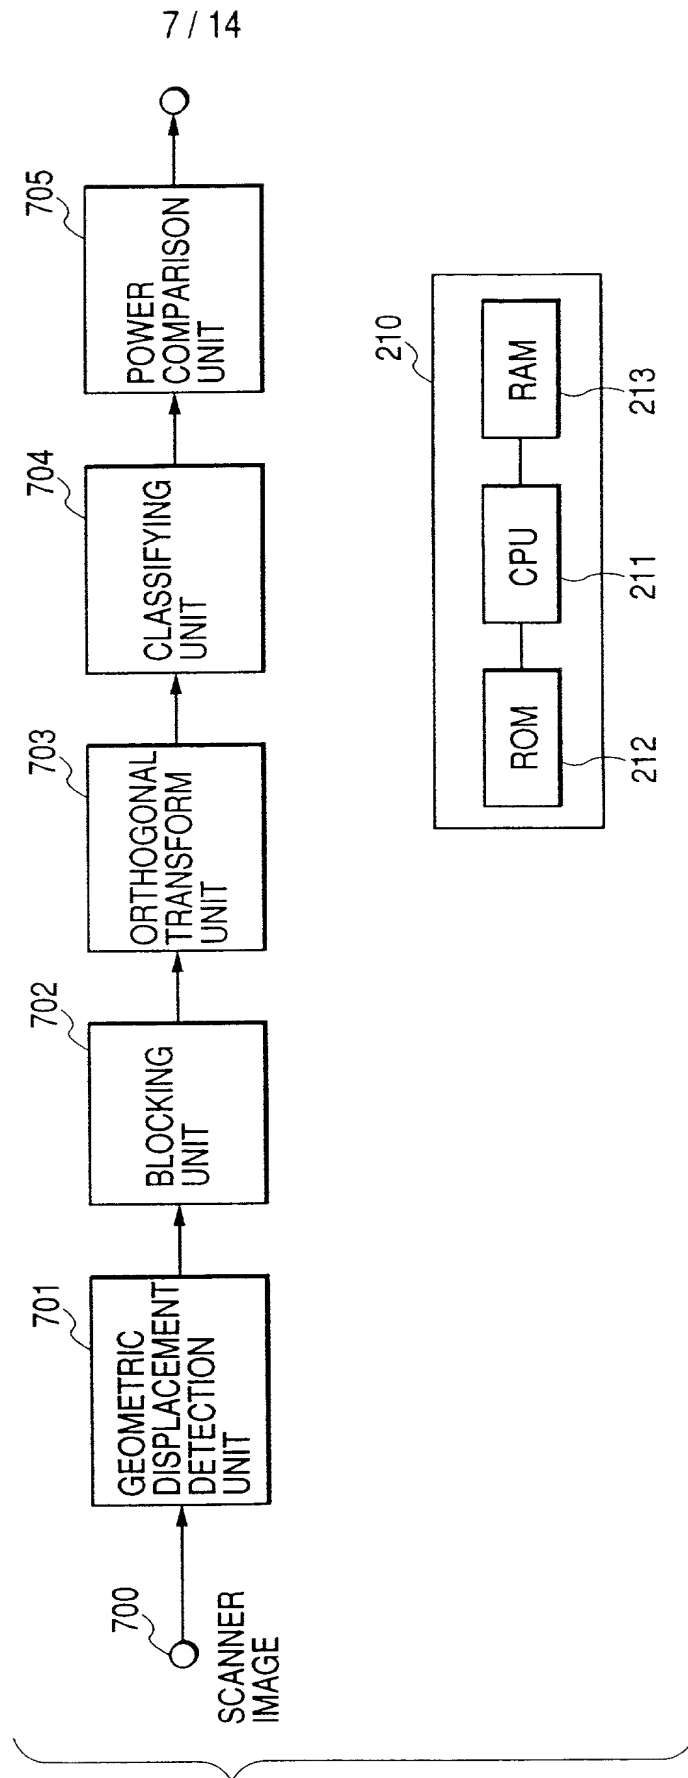


FIG. 8

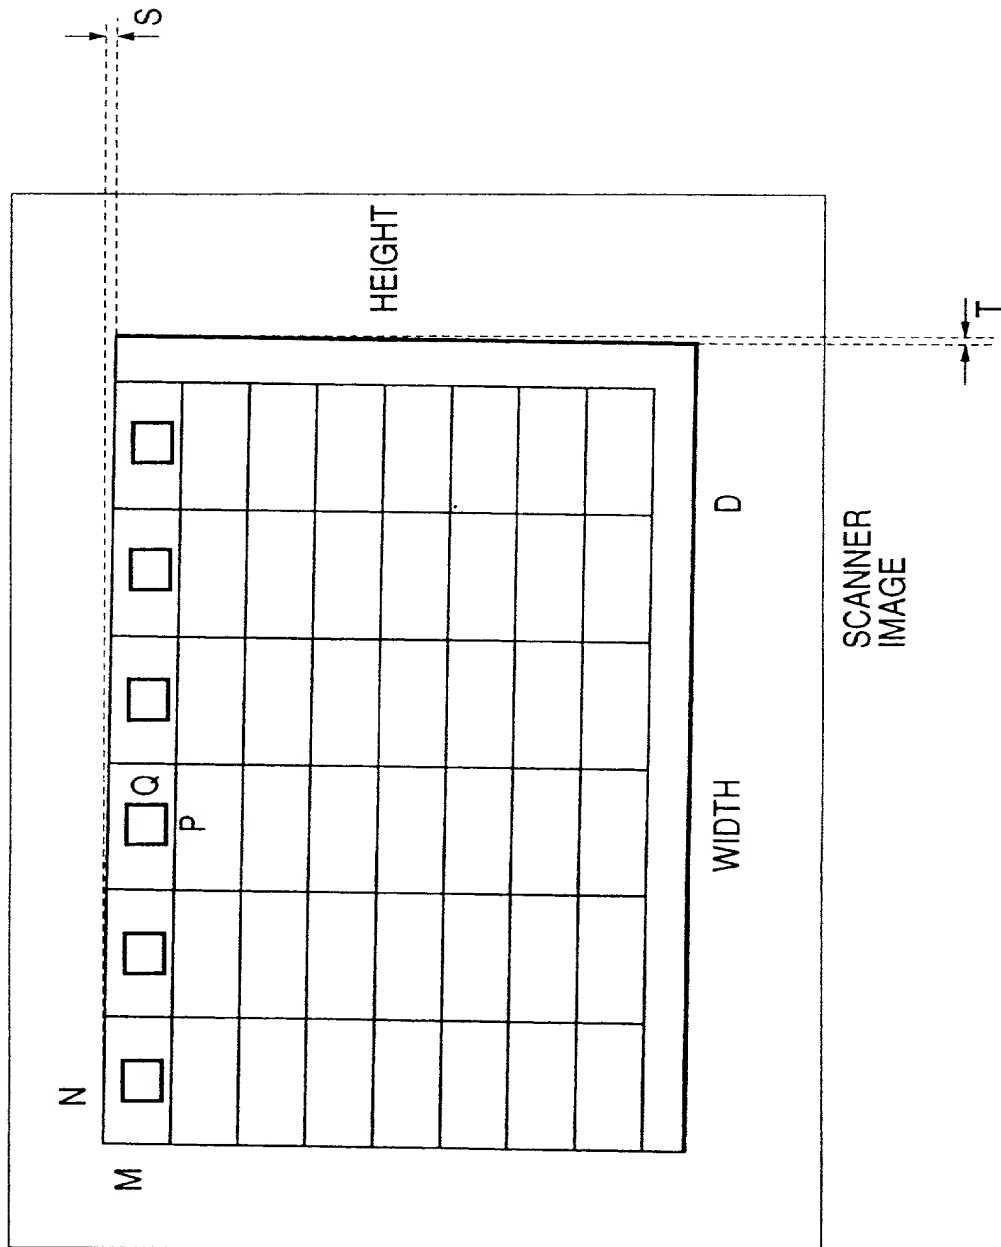

*FIG. 9*



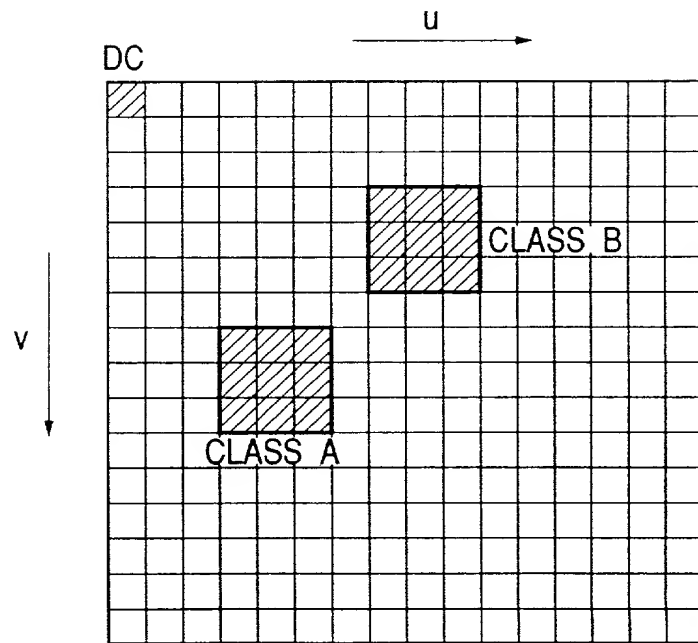





FIG. 10

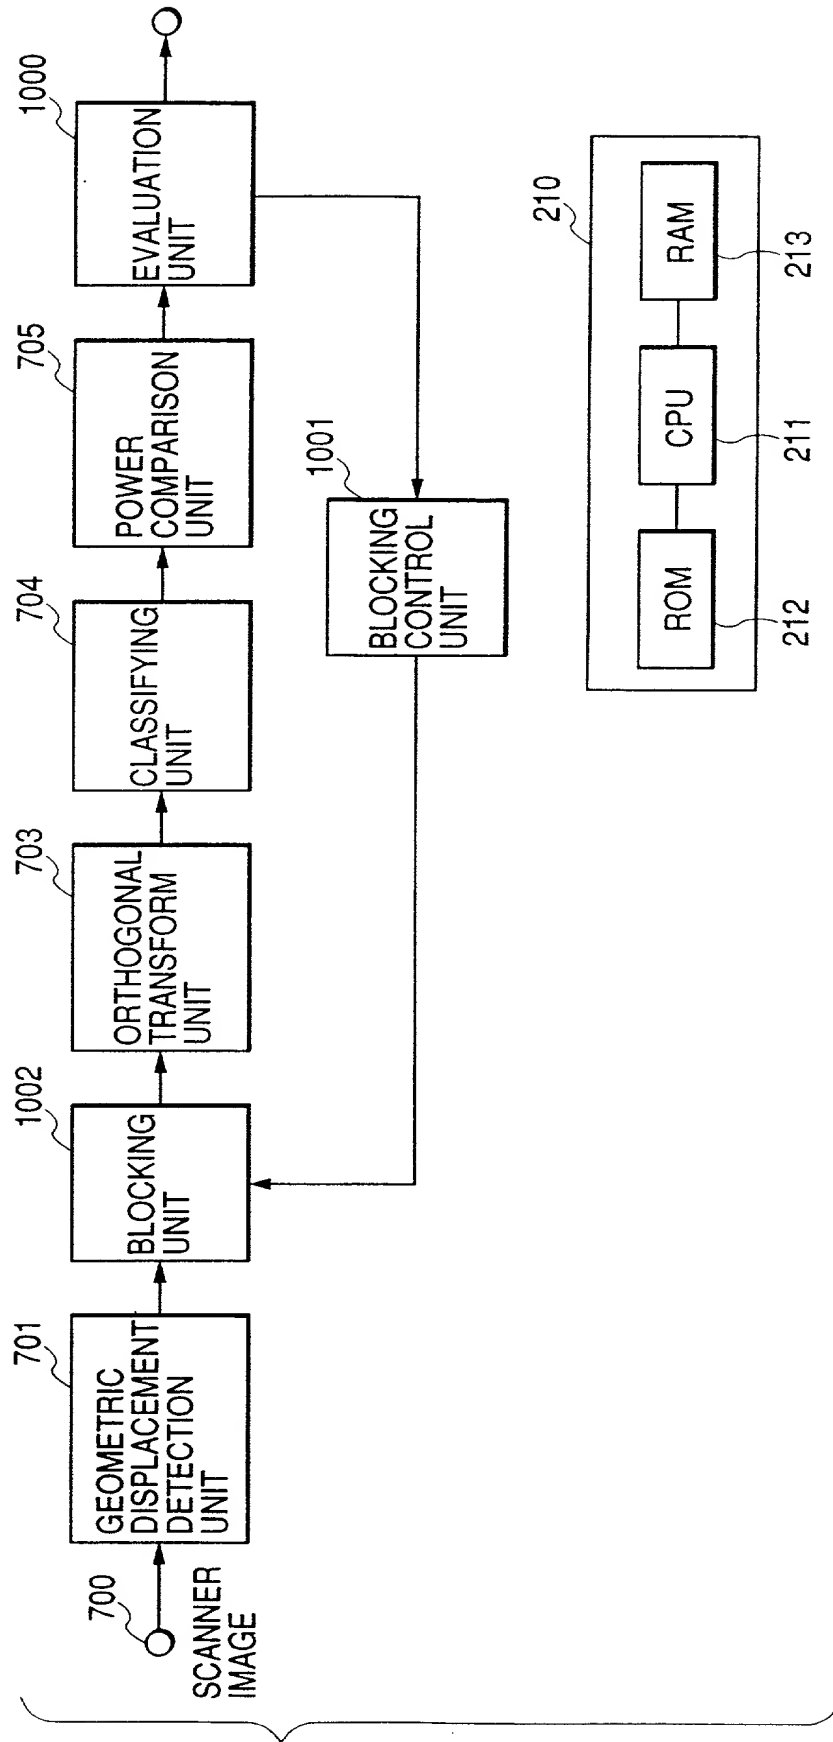


*FIG. 11A*

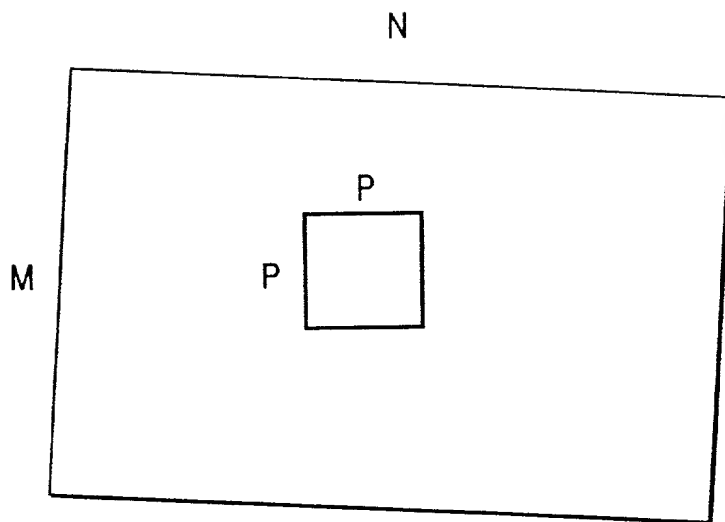

*FIG. 11B*

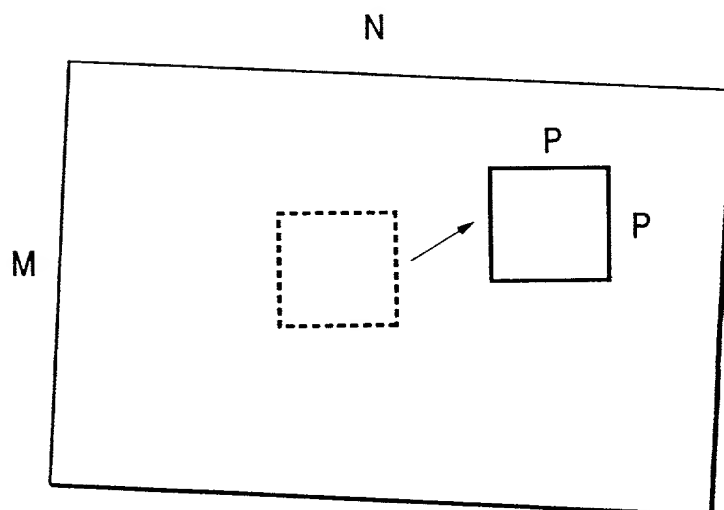

*FIG. 12A*

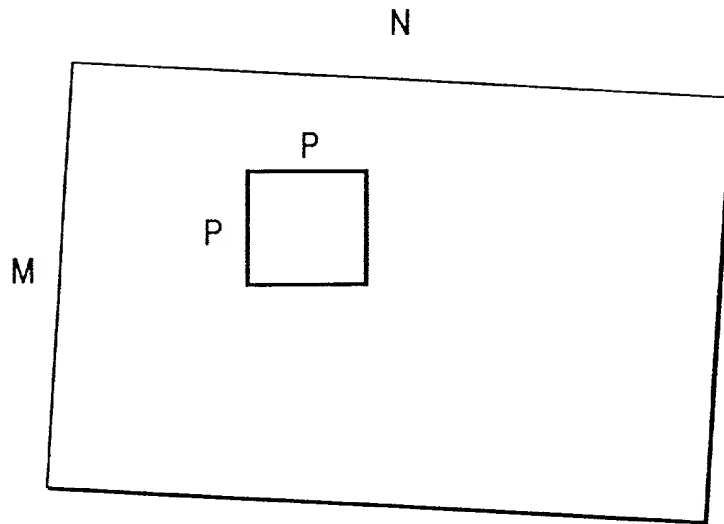

*FIG. 12B*

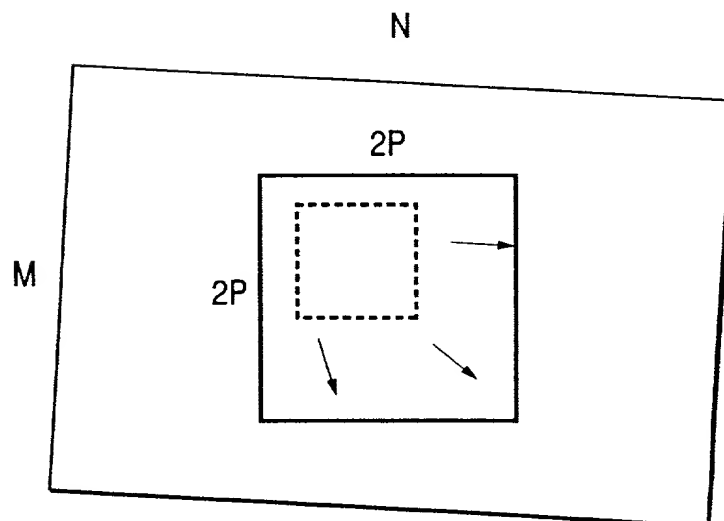


FIG. 13

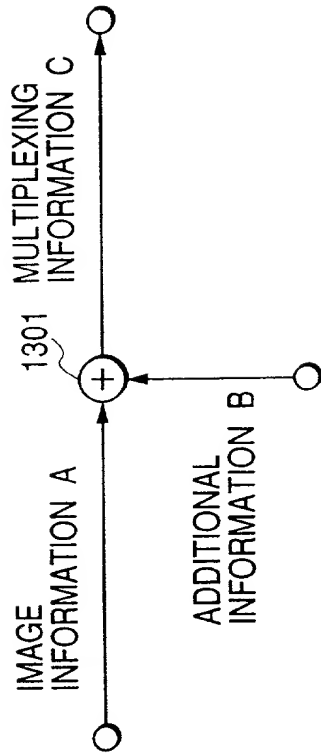


FIG. 14

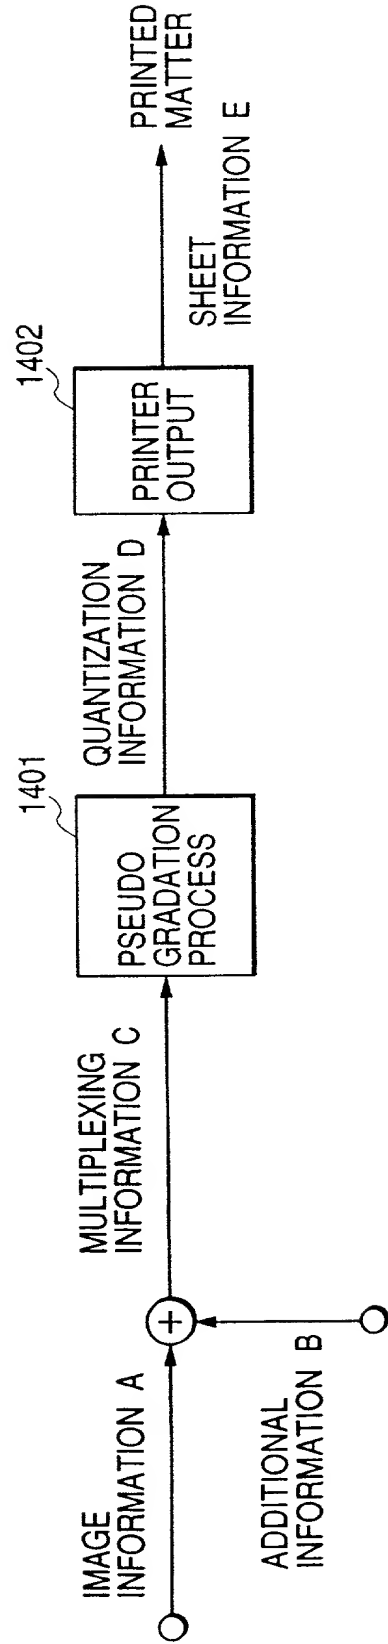


FIG. 15

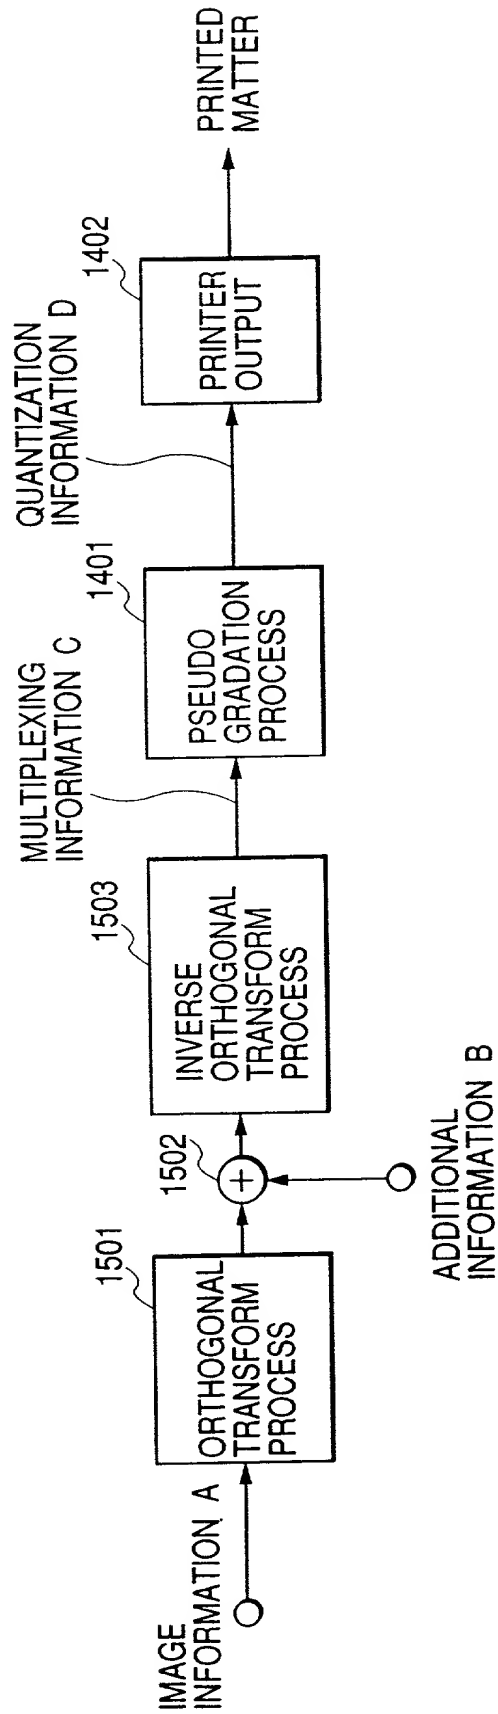


FIG. 16

